

TLS5 Tunable Laser Source

KEY FEATURES

- Ultra wide 1260 nm to 1650 nm continuous wavelength range
- Resolution of 0.1 nm
- Side Mode Suppression Ratio 60 dB at 0.1 nm resolution bandwidth

APPLICATIONS

- CWDM and PON component testing
- General lab use
- Test and measurement

COMPLIANCE

- UL/CSA 61010
- IEC 61010
- FCC Part 15 (Class A)
- EN 61326 (Class A)

IN THE BOX


- TLS5 Tunable Laser Source
- Hybrid jumper
- AC power cord



PRODUCT DESCRIPTION

JGR Optics' TLS5 delivers an ultra-wide continuous wavelength range of 1260 nm to 1650 nm at 0.1 nm resolution, covering the complete CWDM spectral range. It features high Side Mode Suppression Ratio (SMSR) over 60dB, low coherence length and high repeatability, which makes this source perfect for characterization of CWDM, PON and other optical components as well as for general lab use.

The output power of the TLS5 is typically between -5 dBm to + 5 dBm.

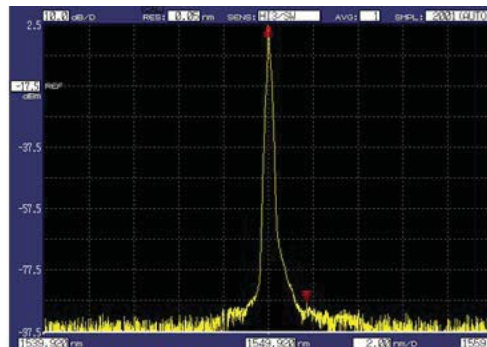

ORDERING SCHEME

TLS5 - -FA

BAND	
CL	1520-1630
W	1260-1630

SPECIFICATIONS

OPTICAL / ELECTRICAL SPECIFICATIONS		
Parameter	Specification	
	CL	W
Wavelength Range (nm)	1520-1650	1260-1650
Power Stability (dB) ¹	±0.01	±0.07
FWHM (pm)	0.1	
Power Repeatability (dB) ²	± 0.02	± 0.02
Output Power (dBm)	-5 to +5	
SMSR @ 0.1nm BW (dB)	>60	
Wavelength Stability (pm) ³	±8	
Wavelength Accuracy (pm)	±50	
Wavelength Repeatability (pm)	±80	
Resolution (nm)	0.1	
Tuning Speed (nm/s) ⁴	25	
High Frequency Modulation (kHz)	75	
Output Type	Panda PM fiber	
Output Connector	FC / APC	
PER, PM output (dB)	18	
Communication Interfaces ⁵	RS-232C, GPIB (IEEE-488.1) and BNC	
Laser Safety Classification	Class 1M	

Footnotes:

¹over 15 minutes

²At constant temperature, over 100 sweeps

³Over 1 h at constant temperature

⁴100 nm/s available

⁵BNC for modulated Trig IN/OUT

HOW TO ORDER

Please contact JGR for more information.

CONTACT US

JGR Optics Inc.

160 Michael Cowpland Dr.
Ottawa, Ontario
K2M 1P6 CANADA

Tel: 613-599-1000

Fax: 613-599-1099

Email: info@jgroptics.com

All information contained herein is believed to be accurate and is subject to change without notice. No responsibility is assumed for its use. JGR Optics Inc. 2015